

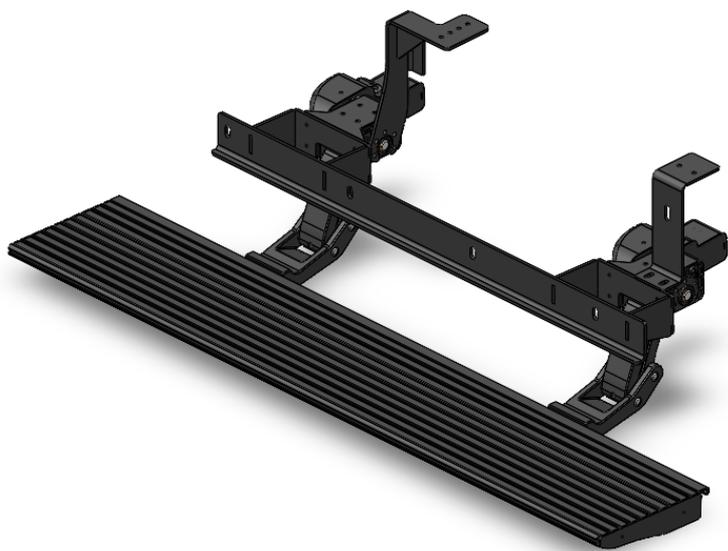
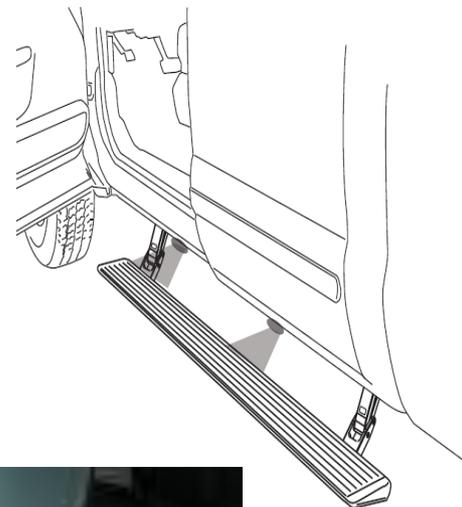


# -board

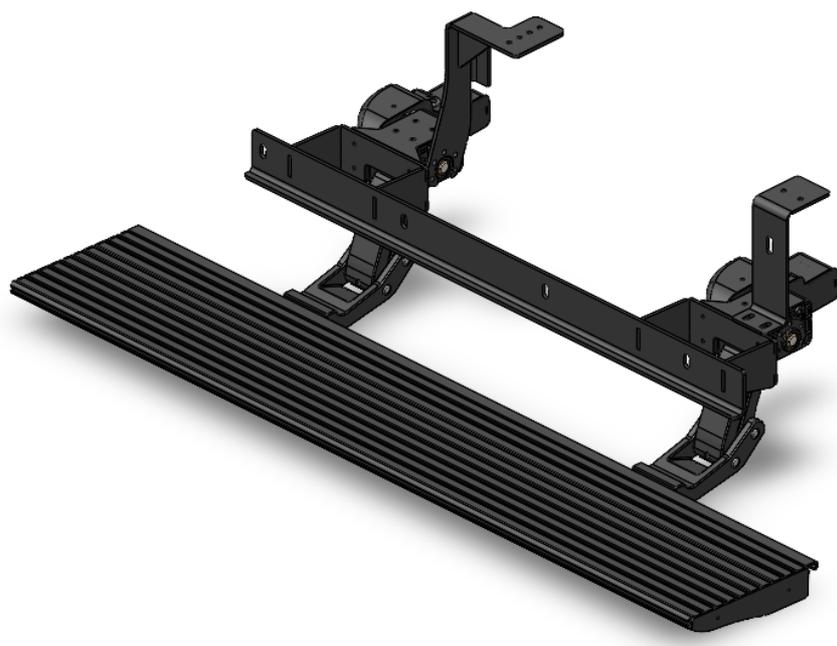

# SPRINTER

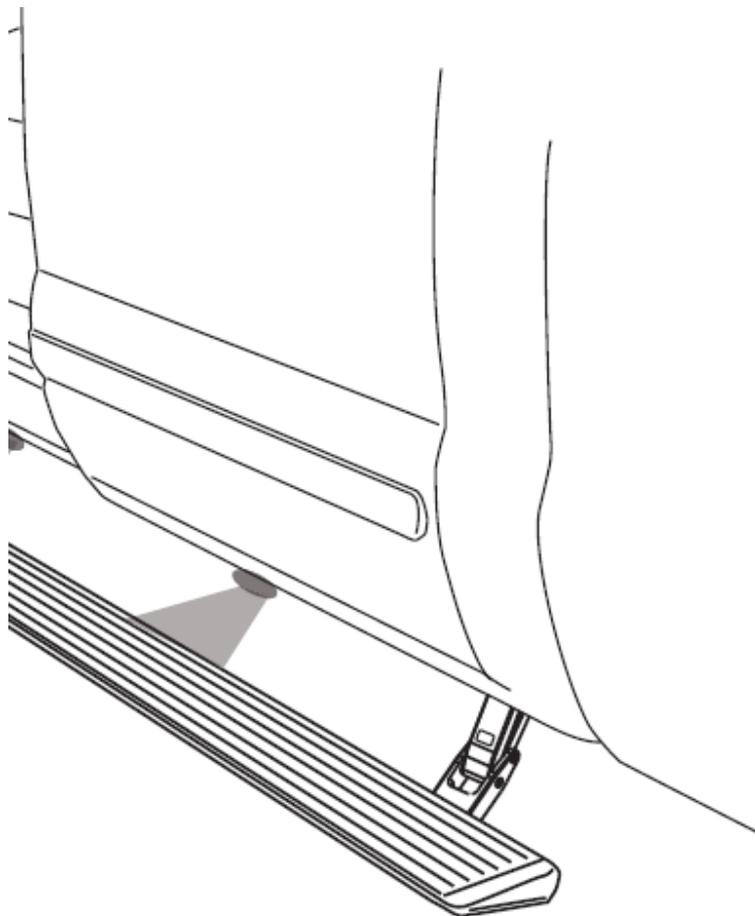

## ASSEMBLY TIME

3 – 4 HOURS

Professional installation recommended



## DIFFICULTY LEVEL




## LOADOUT LIST

- Protective Glasses
- Cricket wrench and levers
- Cable scraper
- Allen Key kit
- Electrical insulation tape
- Pliers
- 8 mm wrench
- 13 mm wrench
- 10 mm wrench
- Drill
- 10 mm drill bit

WARRANTY PERIOD  
2 YEARS

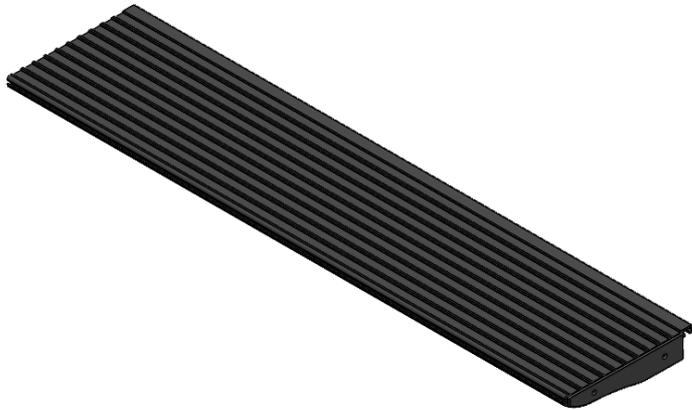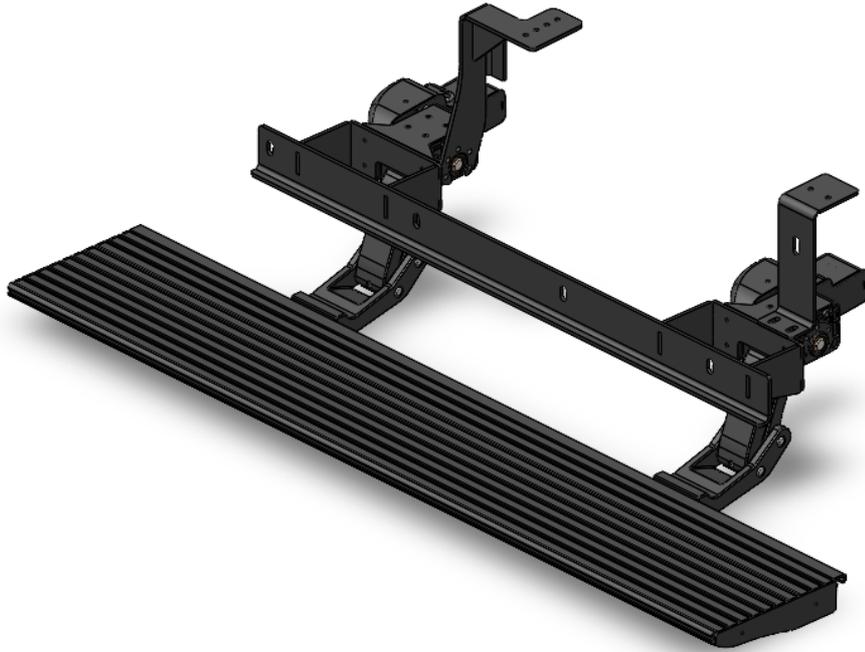


Board

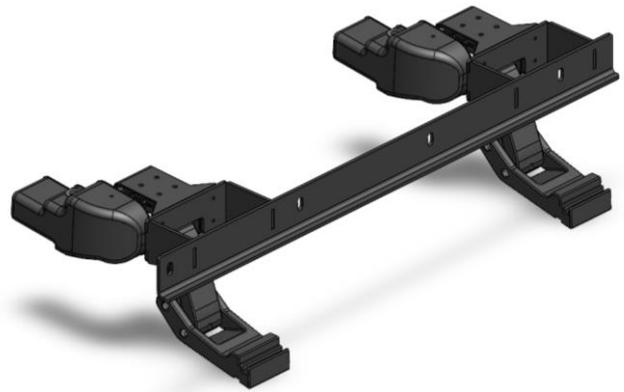


Carrier Legs With Motors



Rear Leg

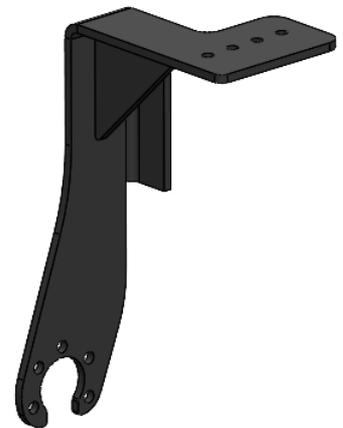


Front Leg

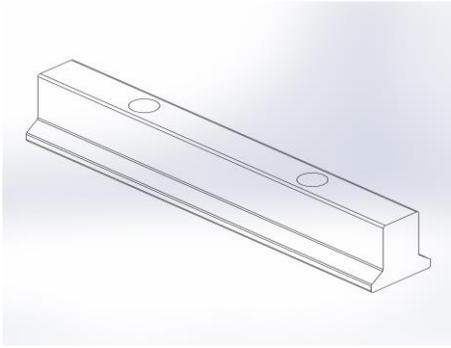


Board profile bracket




M6 x 35 Imbus bolt

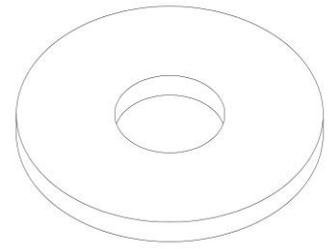

M8 Washer

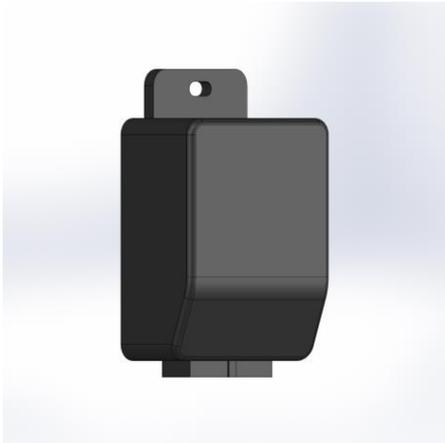


Control Unit

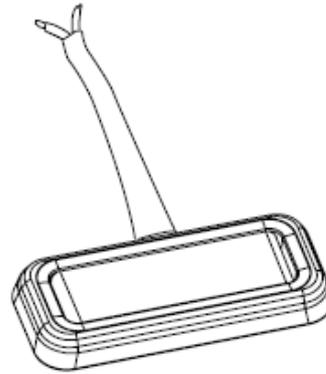


LED



5,5x25 trapezoidal screw


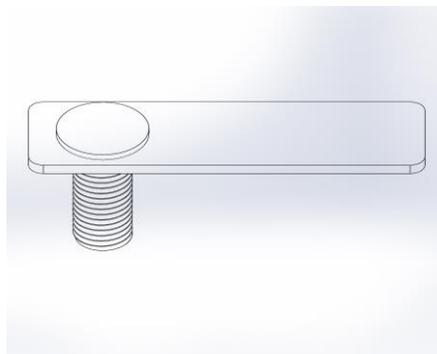


M8 x 30 Connection bolt-3

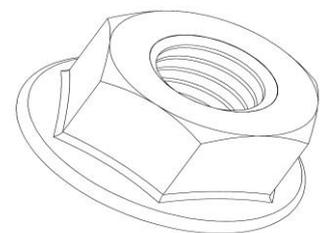


M10 Nut


## DUAL MOTOR V - BOARD

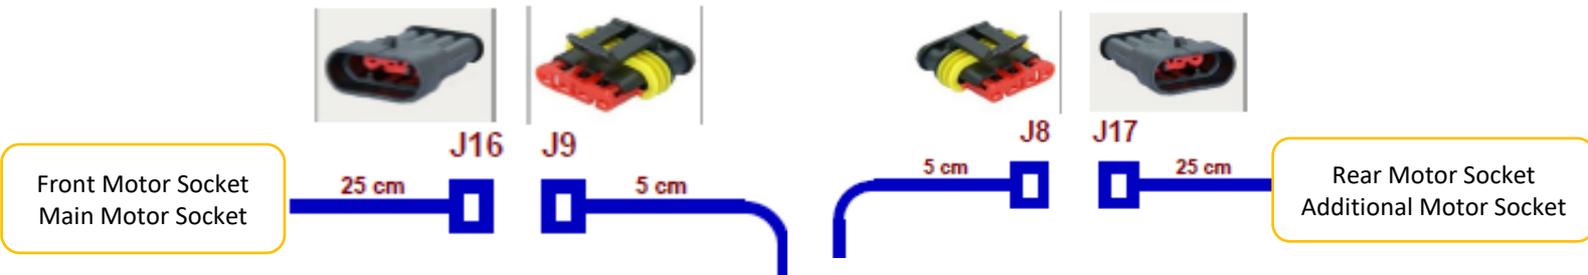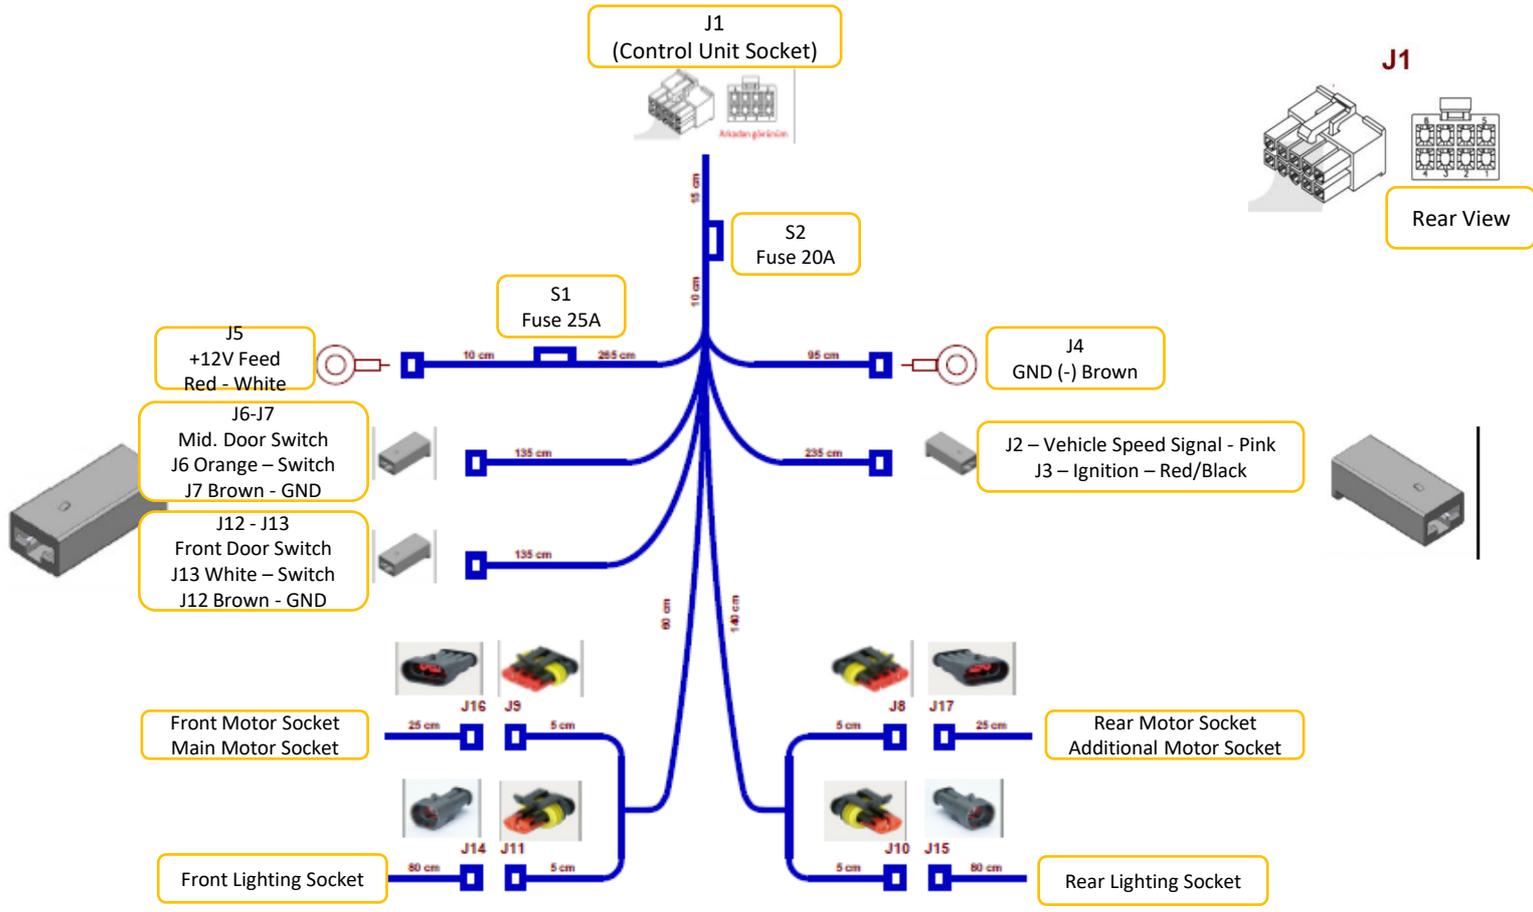

Front Lighting  
Socket

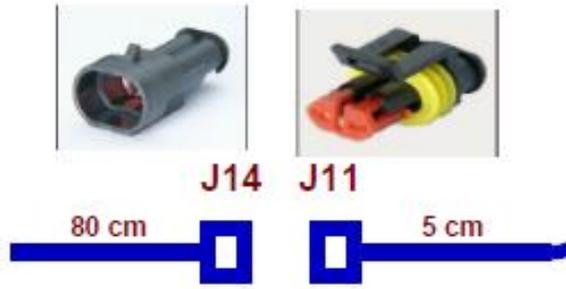


LED – 1 Connection

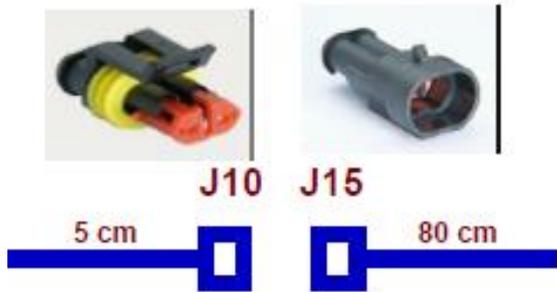




Rear Lighting  
Socket

LED – 2 Connection

Front Motor  
Socket

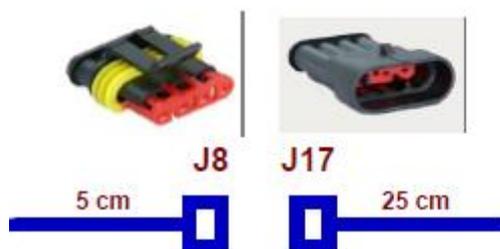

Rear Motor  
Socket

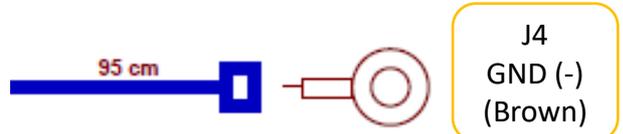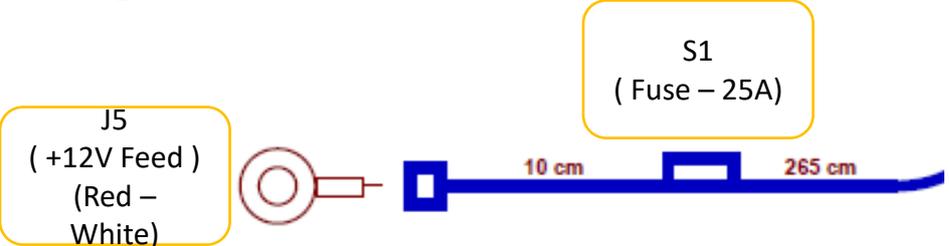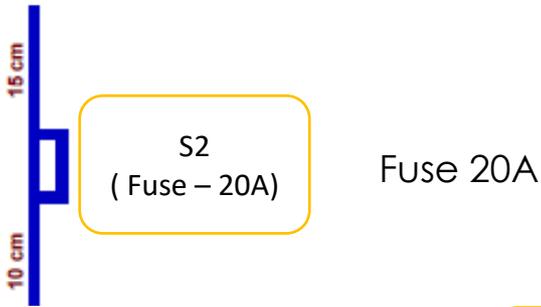


Ignition and Speed information connection.

(\*\*\* This connection is optional; not mandatory for v-board to operate.)




Middle Door Switch connection

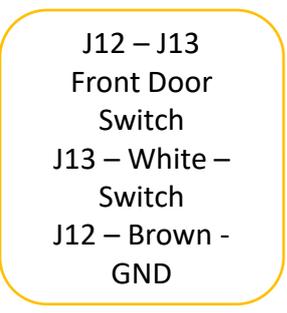

Front Door Switch connector



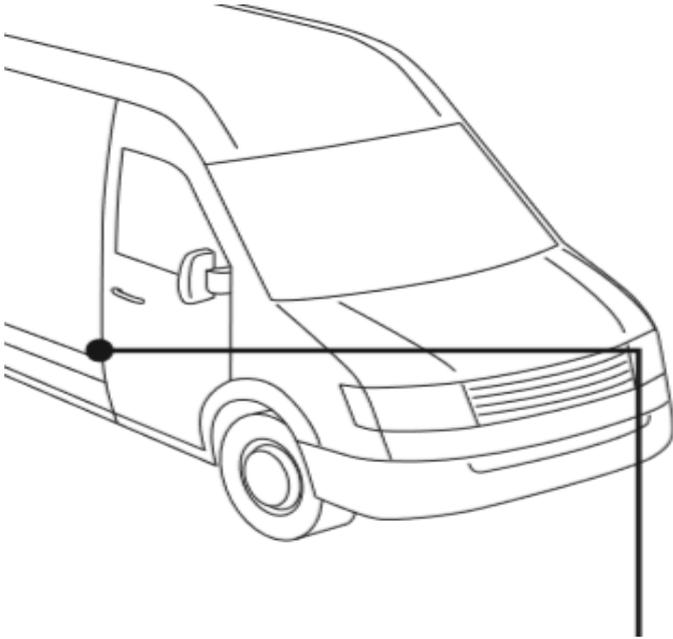


The middle and front door Switch connections are made to the area seen in the figure.



Ø 11 mm hole is drilled for switch assembly.

Mounting is done with a smart mounting screw.

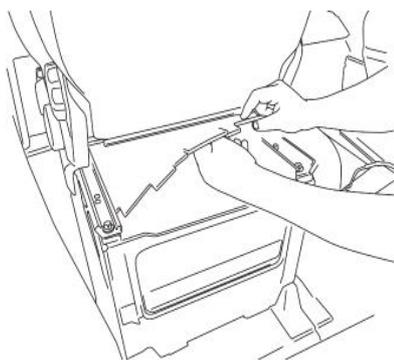


Connection of the wiring and control unit is made in the compartment under the front passenger seat.

1



Wiring connections are made to the vehicle's battery.


2

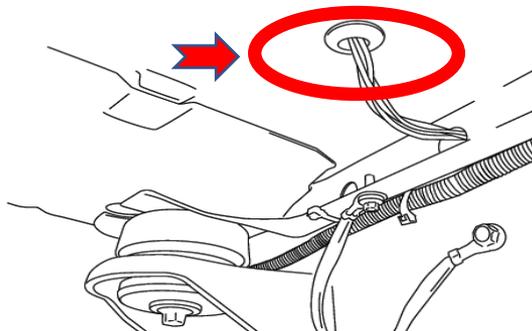


For connections under the vehicle, the wiring is taken to the underside of the vehicle through the hole under the front passenger seat.


3



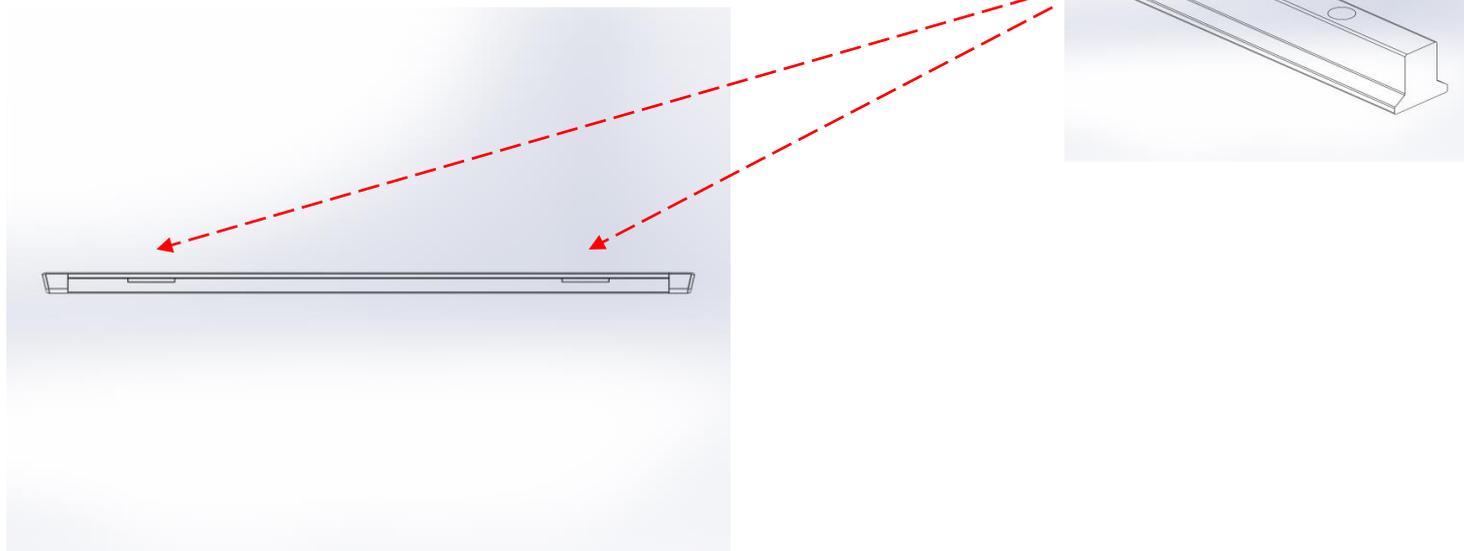

For the installation of carriers on the board, the board profile fittings are should be able to move through the board channel. The carrier chassis is shifted to the section where the installation will be made, and the board is mounted together with the carrier chassis.

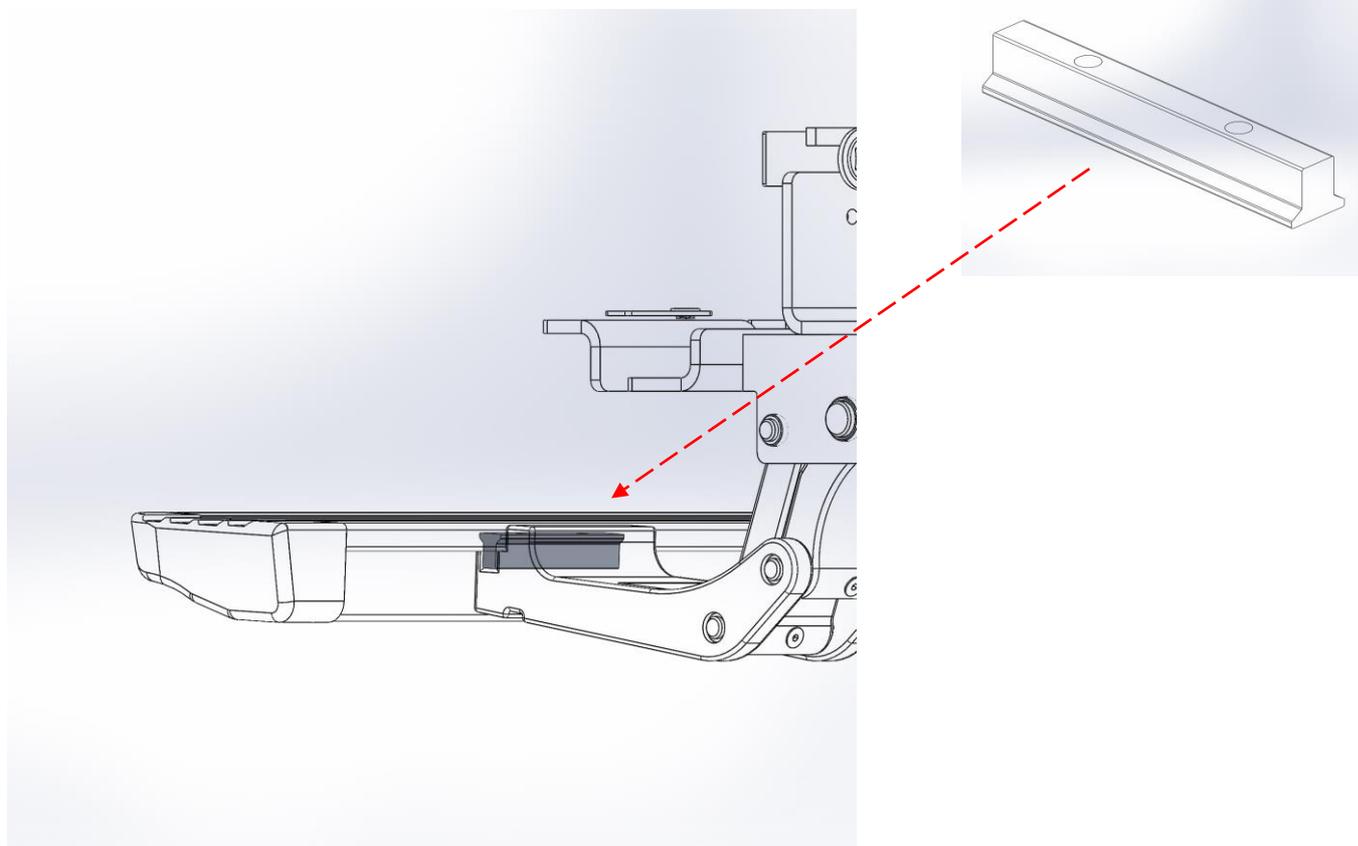

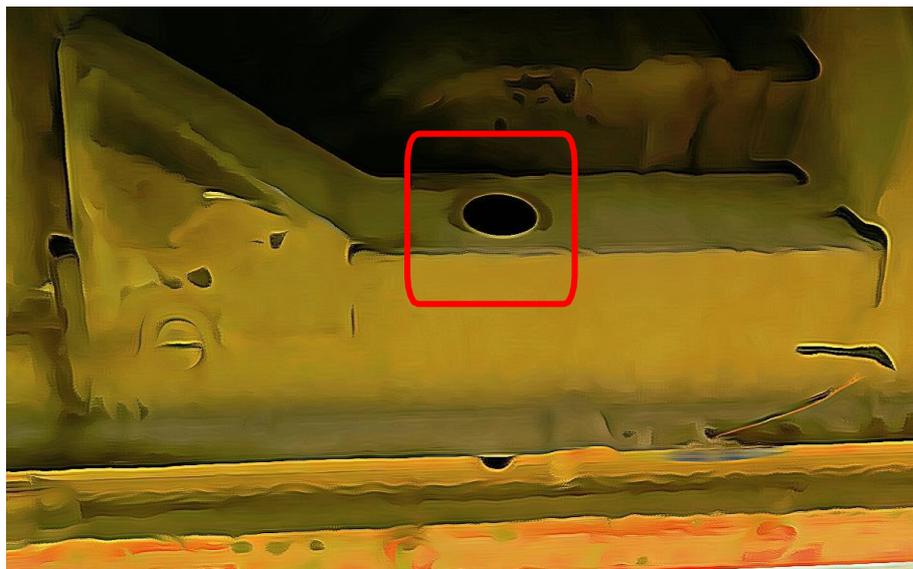


The original chassis hole of the vehicle is used for the carrier chassis connection.

1




For the carrier chassis connection, 4 bolts are placed in the original chassis holes of the vehicle.

2

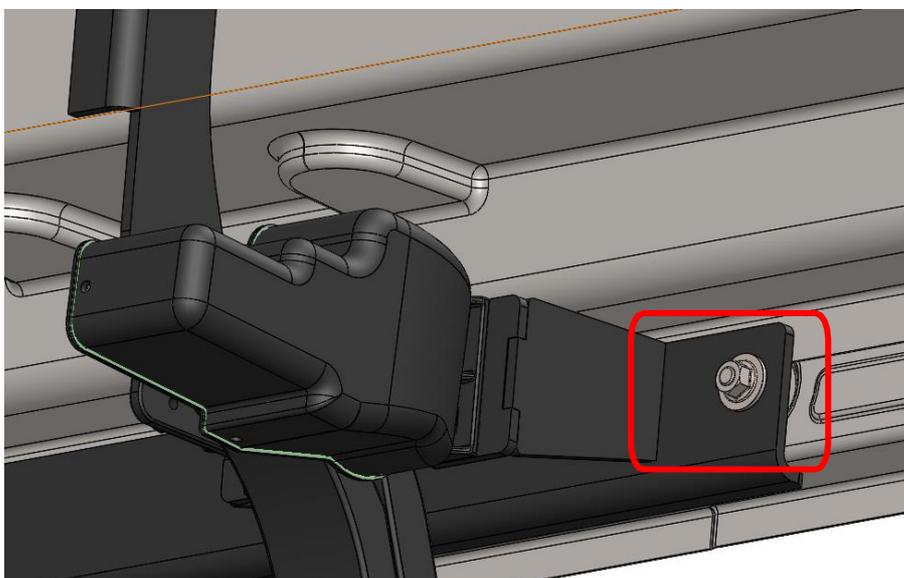

The mounting of the carrier chassis rear connection bolt to the vehicle is as seen in the picture.

3

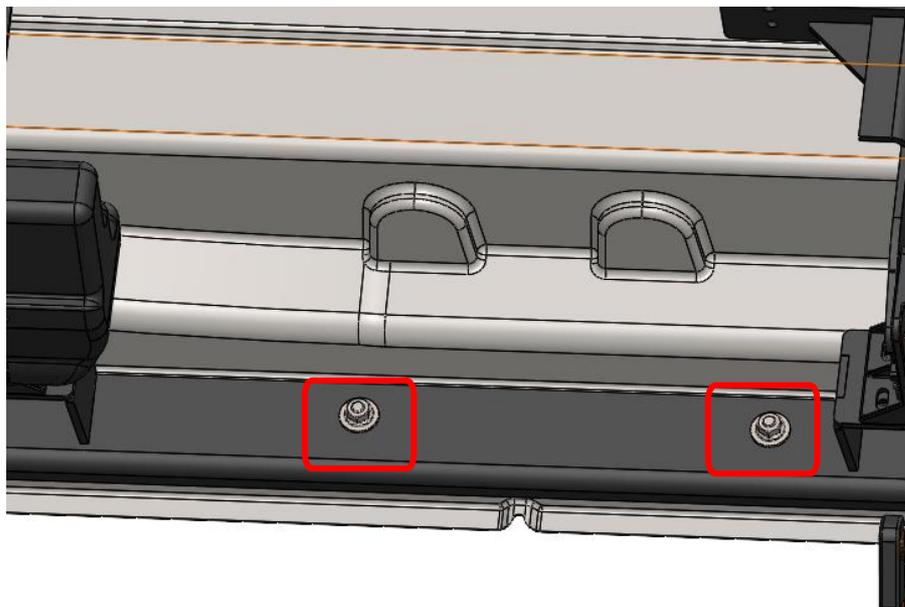


The mounting of the middle connection bolts of the carrier chassis to the vehicle is as seen in the picture.

4



As seen in the picture, the front connection bolts of the carrier chassis are mounted to the vehicle.


5

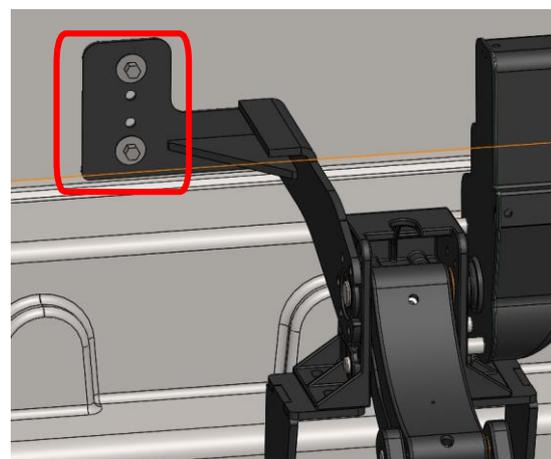


As seen in the picture, the front and rear support legs of the carrier chassis are mounted to the vehicle with the help of trapezoidal screws.

6


Arka

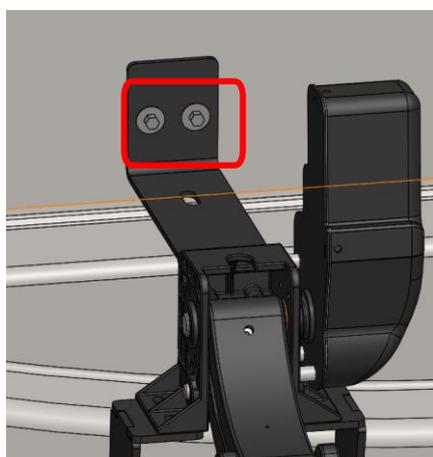

Ön

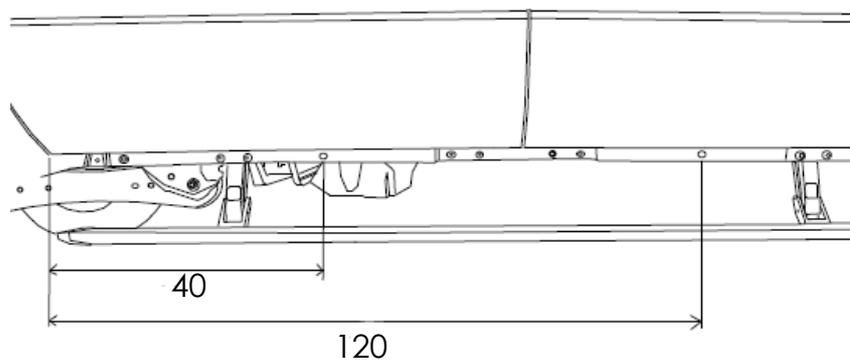


Points where LED installations will be made.

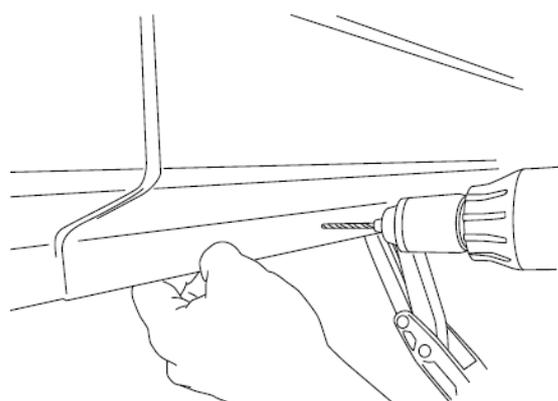


For the installation of LEDs, a hole of  $\varnothing 10$  mm is drilled with a drill near the connection point of the carrier.

1

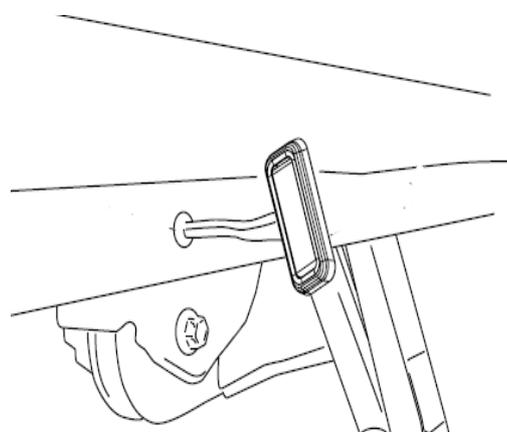


LED cables are threaded through the drilled hole.

2

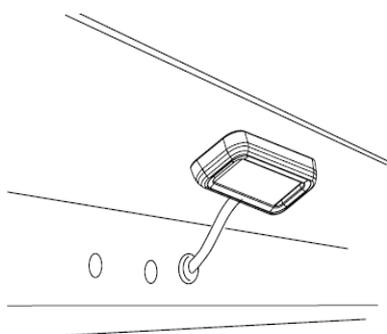

LED cable connections are made. The installation of the LED is completed.


3

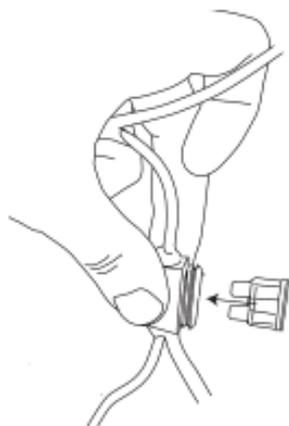

When starting the installation, replace the fuse that removed from the installation. After replacing the fuse, check the operation of the v-board.

4

Check v-board operation, opening & closing. When the door is opened, check that the LED light is lit.

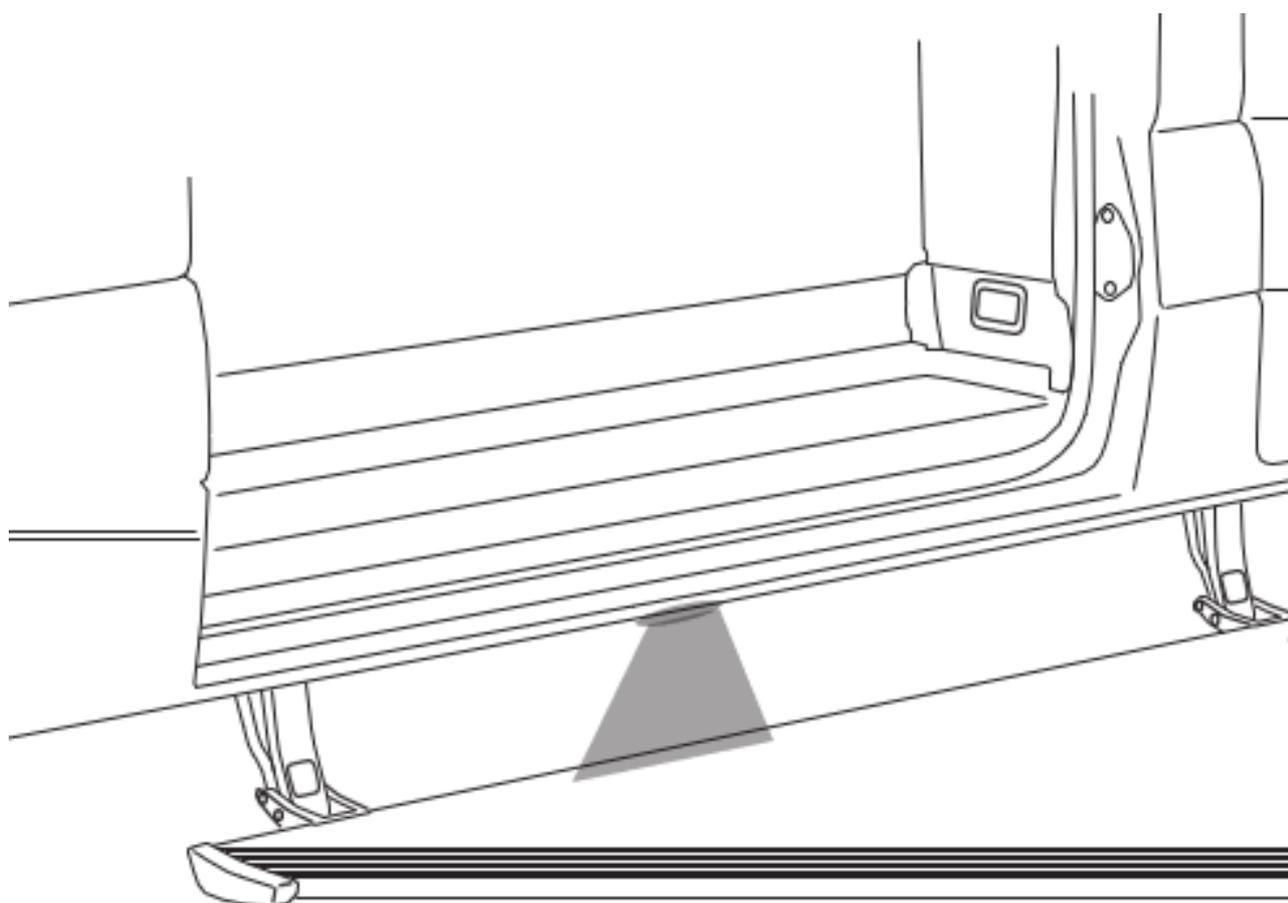

### V-board Opening

When the doors are opened, the v-board will automatically open out and down.




### V-board Closing

When the doors are closed, the v-board will automatically return to the closed position.

### V-board Automatic Stop

The v-board will automatically stop when it encounters an object or obstacle during opening. Open or close the door so that the V-board can continue to operate normally.

### Maintenance

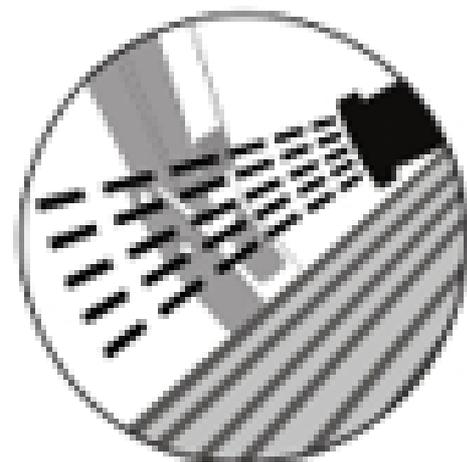

In adverse conditions, noise may occur due to the stuck parts such as sawdust, mud, dirt and dust on the v-board. In this case, direct spraying should not be applied to the motors. Adjust v-boards manually. After washing, apply silicone spray lubricant to the hinge and pins. Do not apply silicone or preservatives to the working v-board surface.

**Attention!** Keep your hands and feet away when the V-board is on the move.

## WARRANTY

The warranty written on the V-board "Veldo warranty certificate" is valid for 2 years from the start date. During product delivery, the customer is given a Veldo warranty certificate. Our customers are required to submit this document in order to benefit from warranty procedures. In order to benefit from the warranty procedures free of charge, the Customer must notify the defect to «Veldo Teknoloji Makine Üretim Sanayi ve Ticaret A.Ş.» authorized dealer / service or «Veldo Teknoloji Makine Üretim Sanayi ve Ticaret A.Ş.» in written form. «Veldo Teknoloji Makine Üretim Sanayi ve Ticaret A.Ş.» cannot be held responsible for malfunctions that are not notified in writing form. The customer accepts in advance the malfunction and the damages that may be caused by the malfunction. The warranty period of the product replaced during the warranty application is limited to the remaining warranty period of the purchased product. If it is determined that it is not possible to repair the fault with the report to be issued by «Veldo Teknoloji Makine Üretim Sanayi ve Ticaret A.Ş.» authorized dealer / service or «Veldo Teknoloji Makine Üretim Sanayi ve Ticaret A.Ş.», the replacement will be carried out free of charge.

Improper handling (impact, drop, hit), incorrect and insufficient maintenance, improper and bad use, use of the products in excessively humid, dusty or hot environments or using in corrosive environments harmful to electronic circuits, accidents, electrical (voltage) changes, failures caused by natural disasters, wear and tear on the parts due to normal use and the nature of the material, product or the product's cable defects caused by damage by pests or animals are not covered by the warranty.

## WARNING

Ensure that it is installed in accordance with the instructions given when installing the product and following it exactly. Failure to do so could put vehicle occupants in a potentially dangerous situation. After installing or reinserting, recheck the product to make sure it is working properly!!!!!!!!!!!!